

CORRECTED VERSION

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 November 2004 (04.11.2004)

PCT

(10) International Publication Number
WO 2004/094296 A1

(51) International Patent Classification⁷: **B67D 5/70**
(21) International Application Number:
PCT/EP2004/004527
(22) International Filing Date: 20 April 2004 (20.04.2004)
(25) Filing Language: English
(26) Publication Language: English
(30) Priority Data:
03/04999 23 April 2003 (23.04.2003) FR

(71) Applicant (for all designated States except US): FMC
TECHNOLOGIES SA [FR/FR]; Route de Clérimois,
F-89100 Sens (FR).

(72) Inventor; and

(75) Inventor/Applicant (for US only): LE DEVEHAT,
Renaud [FR/FR]; 1, route de Vallières, Ancienne Gare,
Fleurigny, F-89260 Thorigny-sur-Oreuse (FR).

(74) Agent: SANTARELLI; 14, avenue de la Grande Armée,
B.P. 237, F-75822 Paris Cedex 17 (FR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.


(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,
GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report

[Continued on next page]

(54) Title: DISCHARGE ARM ASSEMBLY WITH GUIDING CABLE

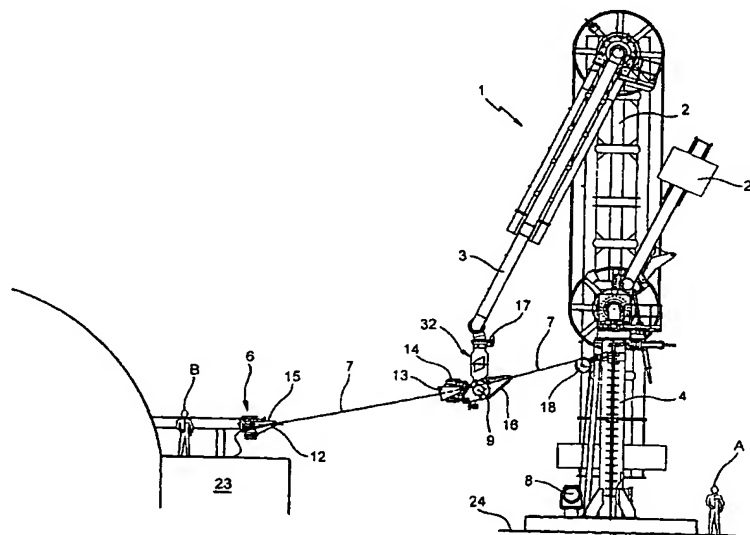

(57) Abstract: Assembly for loading and unloading products, comprising a balanced loading and unloading arm installed at a first location and having a compass-style duct system mounted by one of its ends on a base and provided at the other of its ends with a connection system suitable for connecting the compass-style duct system to a coupling means installed at the second location, this assembly comprising, in addition, a cable joined on the one hand to means integral with the base and suitable for subjecting this cable to a constant tension and suitable for being joined, on the other hand, to the second location, the assembly also comprising guiding means capable of co-operating with the cable so as to guide the connection system along a trajectory materialized by the said cable until the connection system is brought into a position of connection to the coupling means.

WO 2004/094296 A1



(48) Date of publication of this corrected version:

28 July 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(15) Information about Correction:

see PCT Gazette No. 30/2005 of 28 July 2005, Section II